

ONESTO®

KC6pro MCB- 6 KA



Features

- ▶ 18mm width per pole
- ▶ ON/OFF indicator
- ▶ Standard 35mm Din Rail installation
- ▶ 2 Years warranty


Specifications

No of Poles	1P,3P
Rated Voltage	240/415V AC
Rated Short circuit capacity	6000A
Rated Current options	1A,2A,3A,4A,6A,10A,16A,20A,25A,32A,40A,50A,63A
Tripping curve	C
Rated Frequency	50/60Hz
Max cable size	25 mm ²
Rated impulse voltage	4KV


Compliance

- AS/NZS 60898.1:2004
- SAA Approved (SAA-201630-EA)
- IEC 60947-2:2016

Delay tripping characteristic

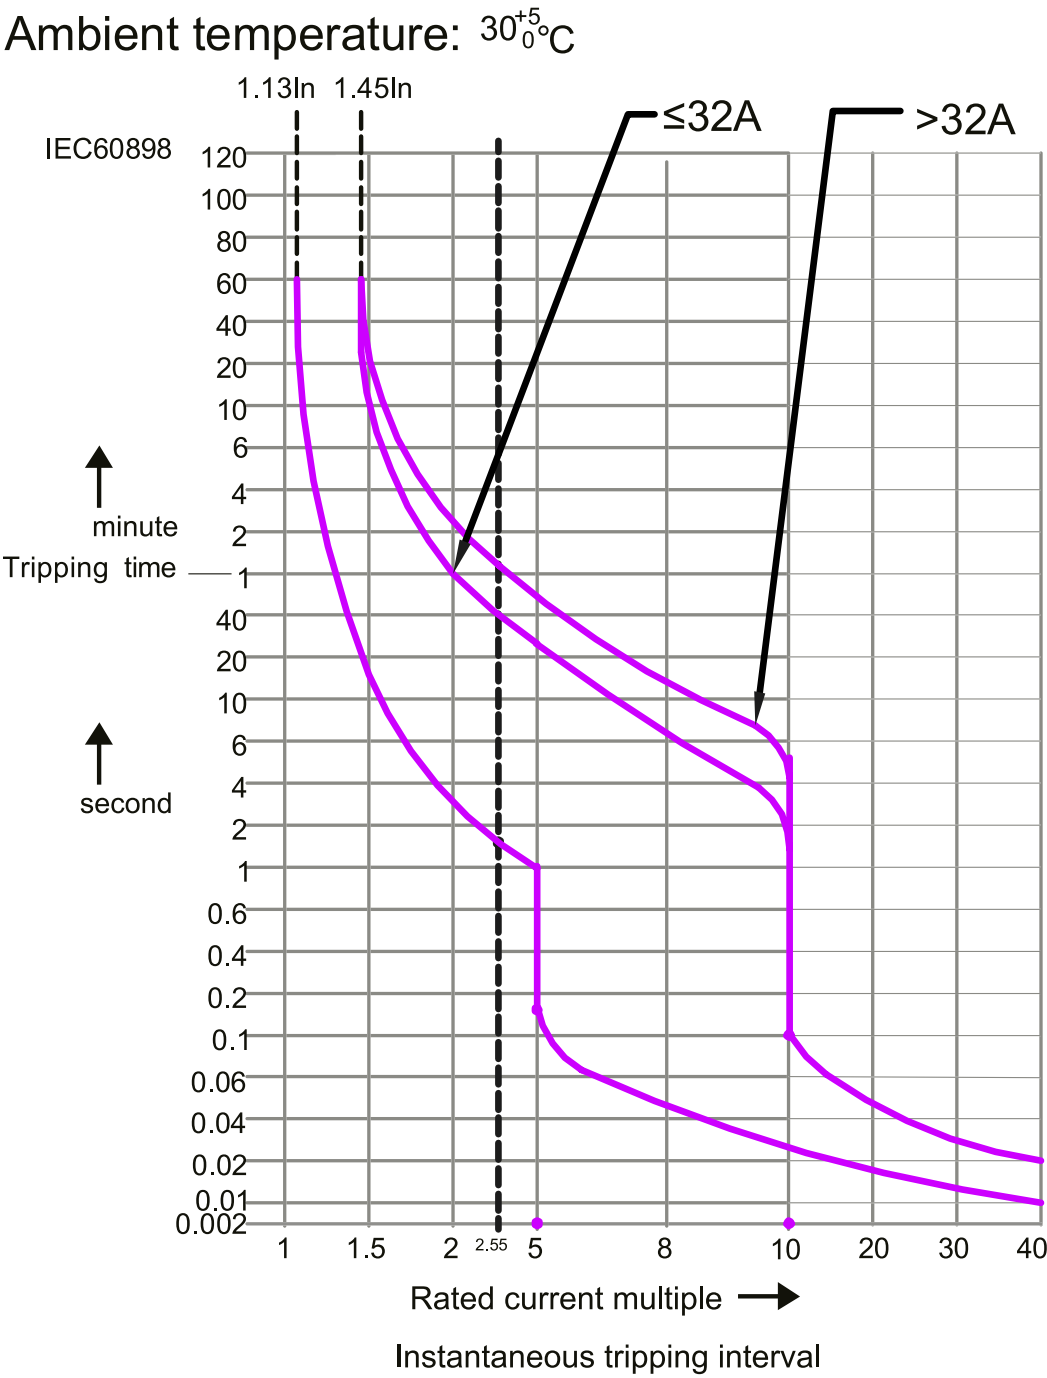

Dimensions(mm)

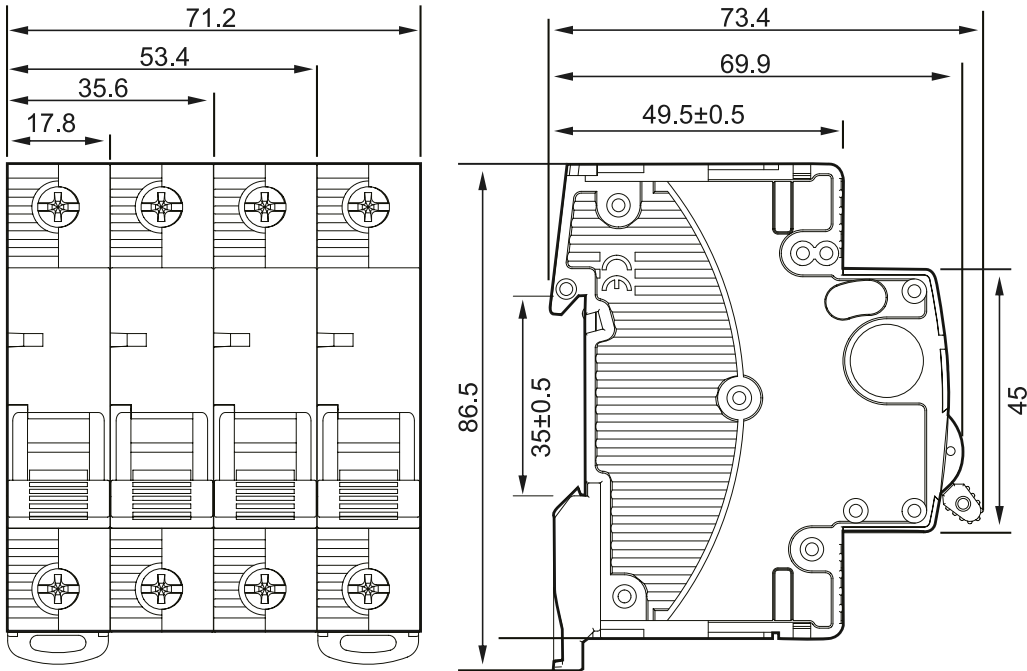

Wiring Diagram

