



KRCN-40L RCBO

1P+N 6KA with Tail



Features

- ▶ Bi-Directional
- ▶ Type A
- ▶ Switched Active+ Neutral
- ▶ 18 mm width (1 Module)
- ▶ ON/OFF indicator
- ▶ Standard 35mm Din Rail installation
- ▶ 1000mm pre-wired neutral lead
- ▶ 2 Years warranty


Specifications

Rated Voltage	230/240VAC
Rated Short circuit capacity	6000A
Rated residual operating current	30mA
Rated Current options	6A,10A,16A,20A, 25A,32A,40A
Tripping curve	C
Rated Frequency	50/60Hz
Max cable size (TOP Terminals)	16mm <sup>2</sup>
Max cable size (Bottom Terminals)	25mm <sup>2</sup>


Compliance

- AS/NZS 61009.1: 2015+A1:2024
- SAA Approved: SAA-250412-EA
- ESV Compliant

Delay tripping characteristic

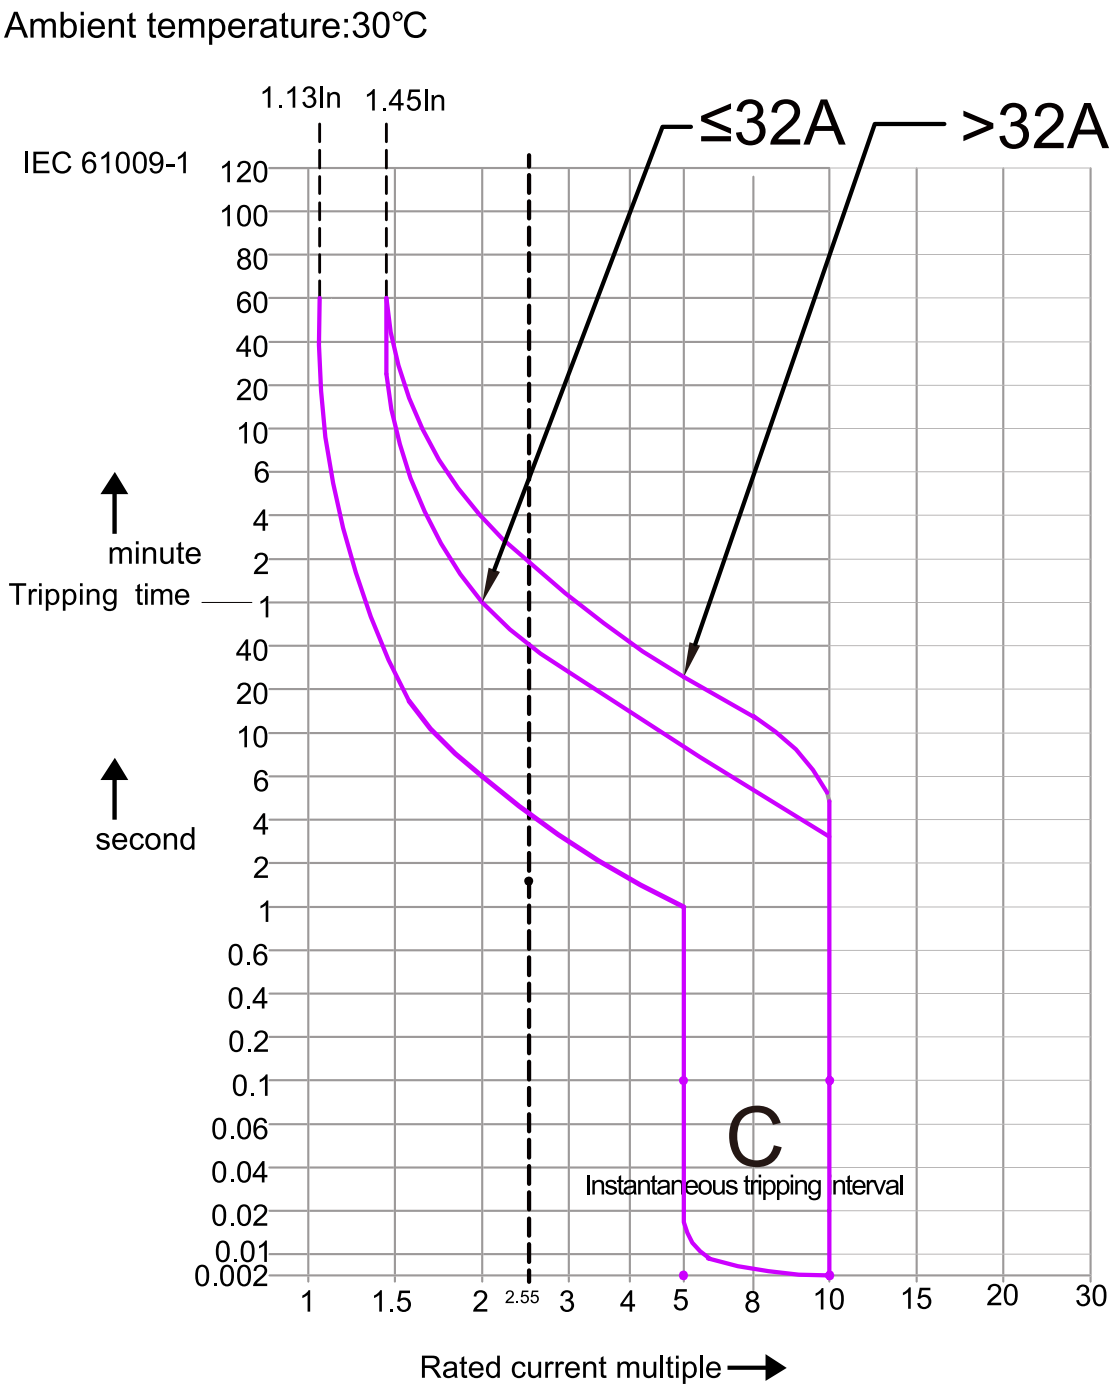

Dimensions(mm)

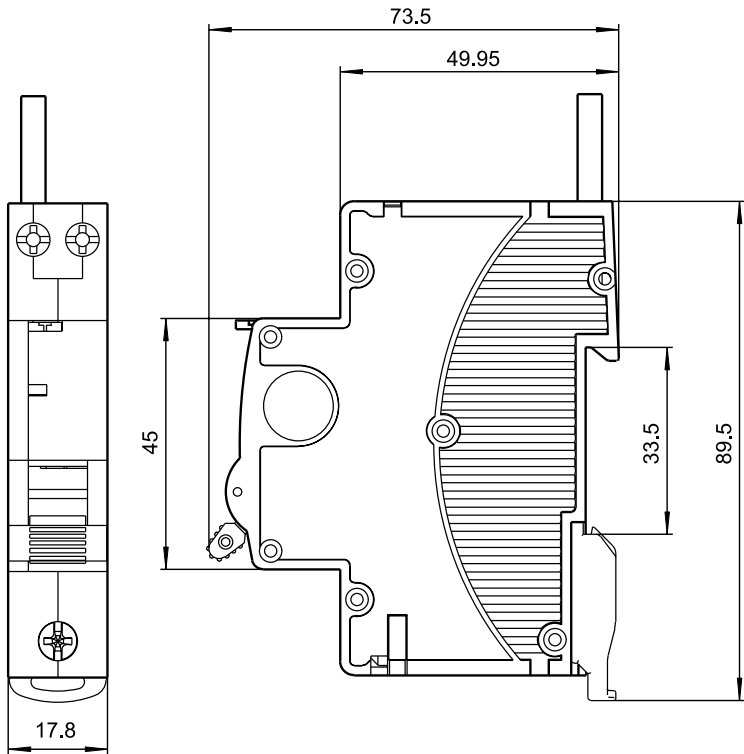

Wiring Diagram

