

ONESTO®

KRCS2E RCBO

1P+N 4.5KA



Features

- ▶ Bi-Directional
- ▶ Type A
- ▶ Switched Active and Neutral
- ▶ 18 mm width (1 Module)
- ▶ ON/OFF indicator
- ▶ Standard 35mm Din Rail installation
- ▶ 2 Years warranty


Specifications

Rated Voltage	230/240VAC
Rated Short circuit capacity	4500A
Rated residual operating current	30mA
Rated Current options	6A,10A,16A,20A, 25A,32A,40A
Tripping curve	C
Rated Frequency	50/60Hz
Max cable size	16mm ² <i>(stranded conductor)</i>
Terminal tightening torque	1.2 N · m


Compliance

- AS/NZS 61009.1: 2015+A1:2024
- SAA Approved: SAA-260343-EA
- ESV Compliant

Delay tripping characteristic

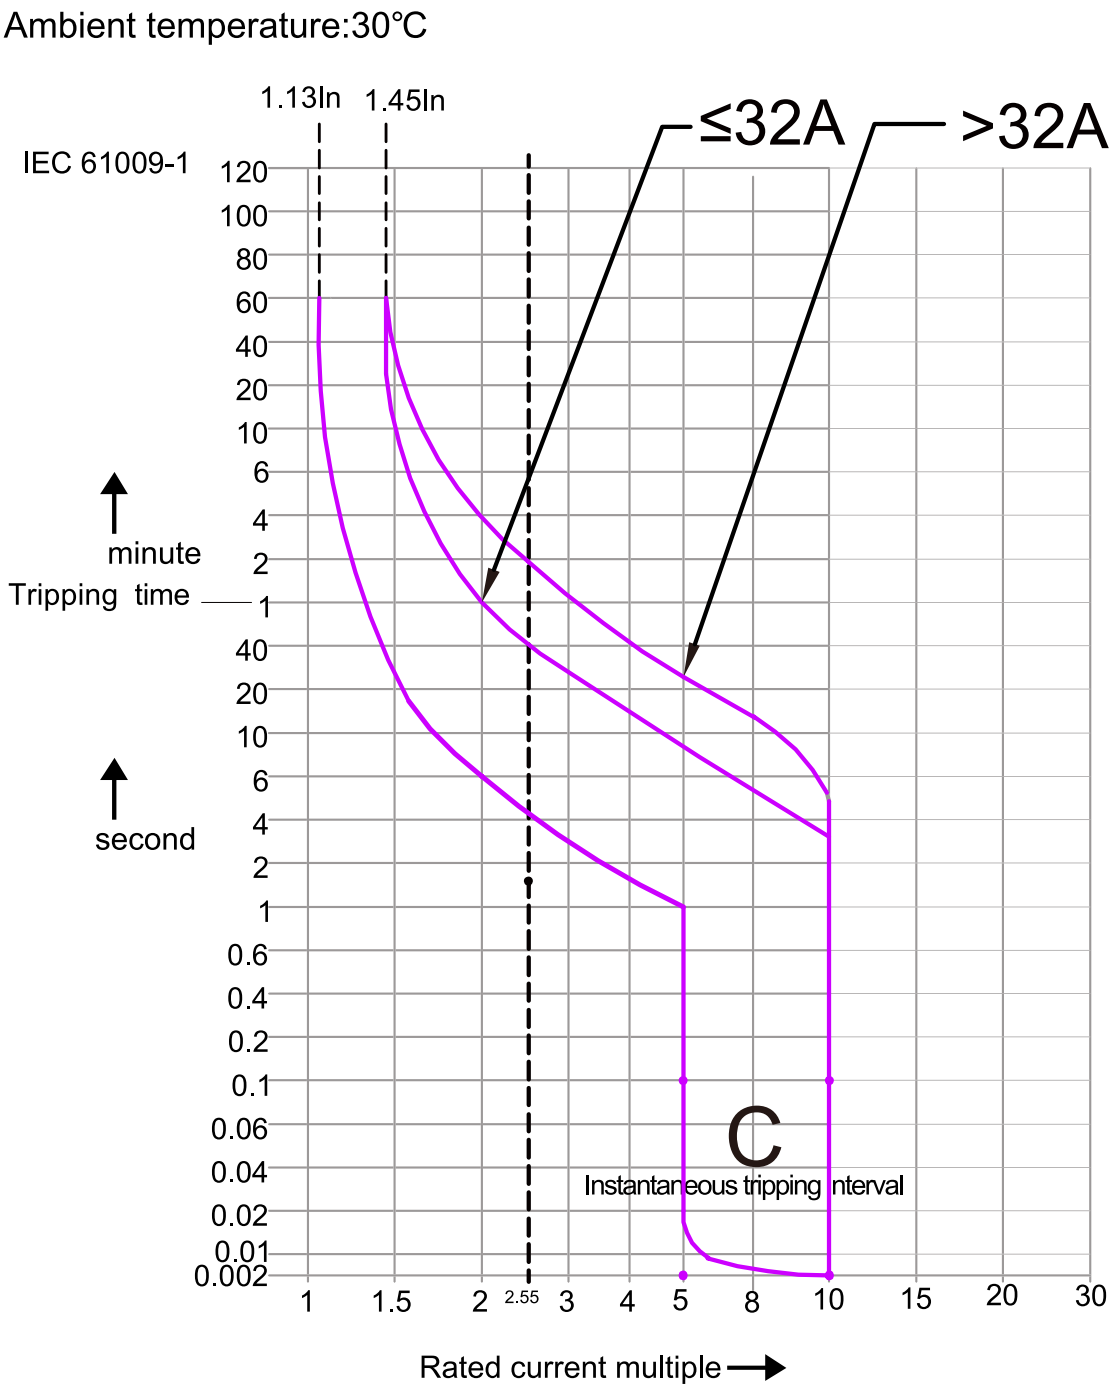

Dimensions(mm)

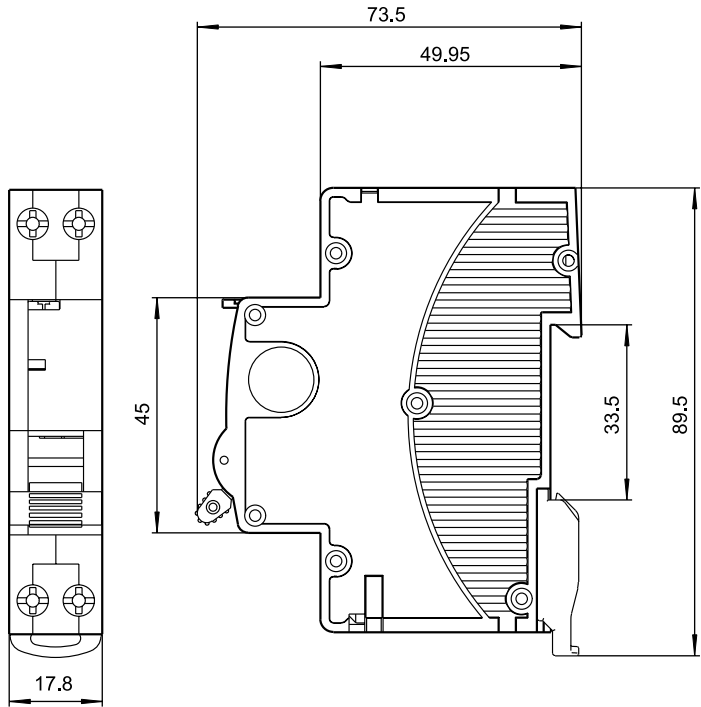

Wiring Diagram

