

ONESTO®

KRCT-63 RCBO

3P+N 10KA with Tail



Compliance

- AS/NZS 61009.1: 2015+A1:2024

• SAA Approved: SAA-260589-EA

• Victoria (ESV): Commercial & industrial use only – exempt from the Compact RCBO prohibition

Features

- 3P+N with uninterrupted Neutral Pole

► Type A

► 54 mm width (3 Module)

► ON/OFF indicator

► Standard 35mm Din Rail installation

► 900mm pre-wired neutral lead


► 2 Years warranty

Specifications


Rated Voltage	400/415 VAC
Rated Short circuit capacity	10000A
Rated residual making and breaking capacity	6000A
Rated residual operating current	30mA
Rated Current options	6A,10A,16A,20A, 25A,32A,40A, 50A, 63A
Tripping curve	C
Rated Frequency	50/60Hz
Max cable size	25mm ² <i>(stranded conductor)</i>
Terminal tightening torque	2 N · m

Delay tripping characteristic

Tripping characteristic curve (C curve)
Ambient temperature 30°C

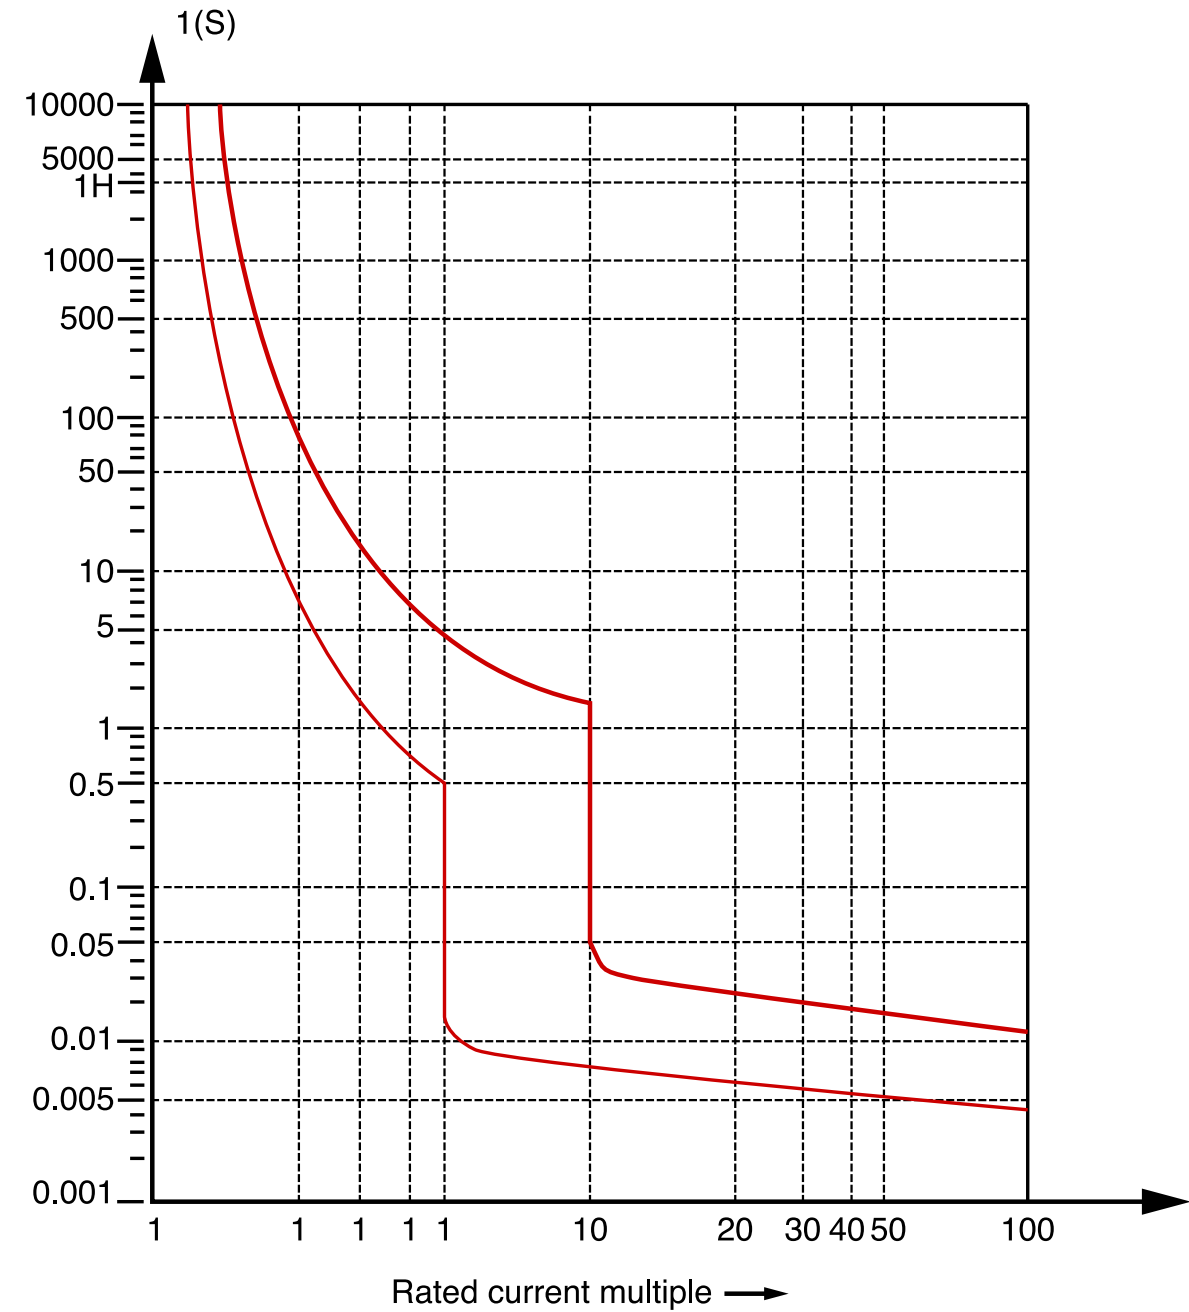

Dimensions(mm)

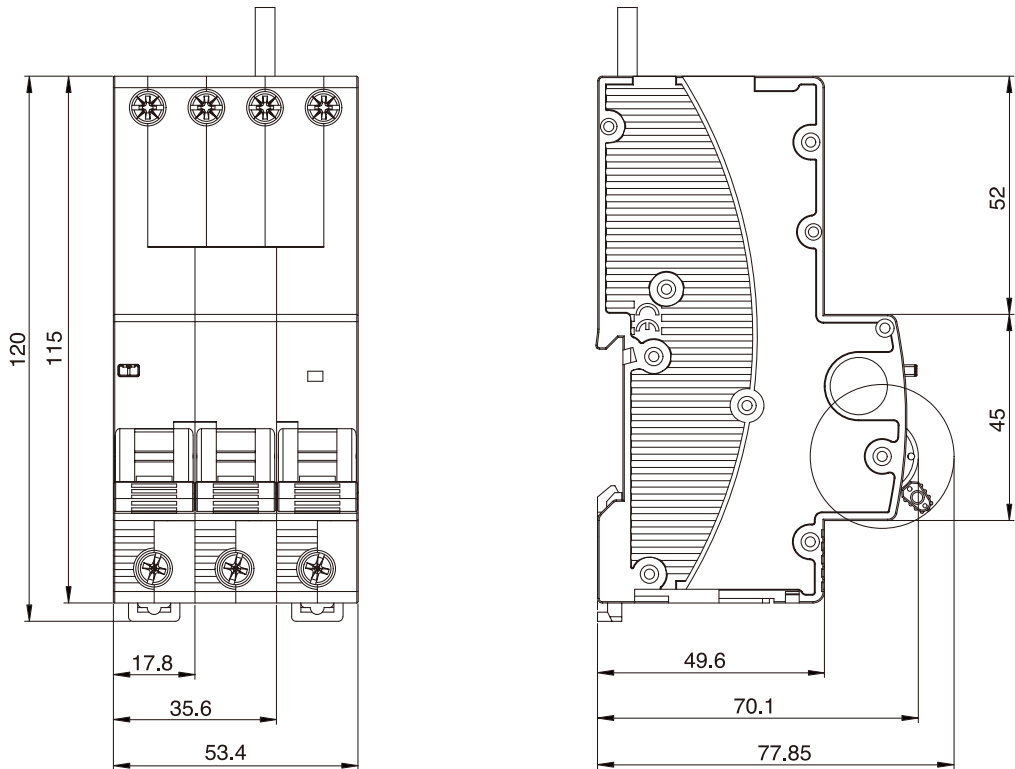

Wiring Diagram

